



## 5MP Outdoor Full-color Active Deterrence Fixed-focal Wi-Fi Pan & Tilt Network Camera

# DH-P5B-PV



### Series Overview

The Picoo series of small PT cameras raises the bar on performance. After detecting an intrusion, it triggers sound and light alarms, and then instantly relays vital information on the intrusion to the mobile client, keeping you informed no matter where you are. It supports two-way talk, allowing you to communicate with people in front of the camera in real time. It also can record full-color videos and information of key events using Smart Dual Illuminators, effectively reducing light pollution.



#### 5MP

Clear images with sharp details



#### Smart Dual Light

Captures color details for post-event review



#### One Camera for 360° View

360° monitoring without blind spots



#### Sound and Light Alarm

Provides instant alarms to deter intruders



#### AI Human Detection

Focuses on what matters and reduces false alarms



#### AI Vehicle Detection

Focuses on what matters and reduces false alarms



#### Preset Patrol

Guards the places that matter to you regularly



#### Auto Tracking

Automatic tracking of targets



#### Abnormal Sound Alarm

Detects abnormal sounds and sends alarms in time



#### IP65 Protection

Withstands harsh environments



#### Wi-Fi 6

Seamless integration of speed and anti-interference



#### Bluetooth Pairing

Fast pairing with Bluetooth




#### H.265

Advanced H.265 compression technology



#### SD Card


Low-cost storage

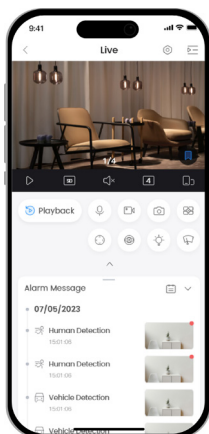

## Upgrade Your Experience with DMSS

Dahua Mobile Security Surveillance (DMSS) is a professional remote surveillance management platform that offers remote monitoring, device migration, and sharing. When connected to the internet, the platform provides real-time alerts to improve surveillance efficiency and grant flexibility in security management.



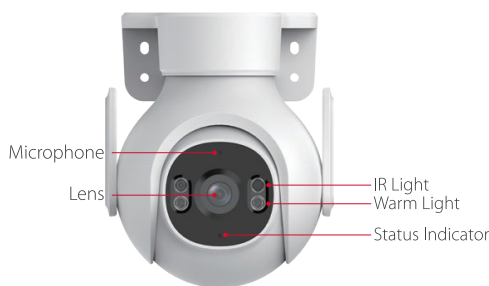

## Specifications

### Camera

Image Sensor	1/3" CMOS
Max. Resolution	2880 (H) × 1620 (V)
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s
Illumination Distance	Up to 30 m (98.43 ft) (IR); Up to 30 m (98.43 ft) (Warm Light)
Illuminator On/Off Control	Auto
Illuminator Number	2 (IR LED); 2 (Warm light)
Angle Adjustment	Pan: 0°–355°; Tilt: 0°–90°

### Lens

Max. Aperture	F1.6
Field of View	H: 78°; V: 40°; D: 93°

### Intelligence

Vehicle Detection	Yes
Human Detection	Yes

### Video

Video Compression	H.265
Video Frame Rate	Main stream: 2880 × 1620@(1-25/30 fps) sub stream: 640 × 360@(1-25/30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Resolution	5M (2880 × 1620); nHD (640 × 360)
Video Bit Rate	H.265: 80 kbps–4096 kbps
Day/Night	Auto(ICR)/Color/B/W
WDR	DWDR
Motion Detection	Yes
Smart Illumination	Yes

Image Rotation	0°/180°
----------------	---------

### Audio

Built-in MIC	Yes, built-in Mic
Built-in Speaker	Yes, built-in speaker
Audio Compression	G.711a

### Network

Network Port	RJ-45 (10/100 Base-T)
Wi-Fi	IEEE 802.11b/g/n 2.4–2.4835 GHz, 2.4 G
Storage	Micro SD card (up to 256 GB)
Management Software	DMSS
Mobile Client	iOS;Android

### Certification

Certifications	CE
----------------	----

### Power

Power Supply	12 VDC, 1 A
Power Consumption	Basic: 1.68 W Max.: 4.56 W (H.265+warm light on)

### Environment

Operating Temperature	–20 °C to +50 °C (–4 °F to +122 °F)
Operating Humidity	≤95%

### Structure

Casing Material	Plastic
Product Dimensions	116 mm × 138 mm × 139 mm (4.57" × 5.43" × 5.47") (L × W × H)
Net Weight	425 g (0.94 lb)

## What's in the box

